



# NAIL STRIP


METCLAD Nail Strip provides a flexible recessed panel cladding solution.



**METFOLD**  
**SHEET METAL**

# OVERVIEW

The METCLAD Nail Strip profile is suitable for both facade and roofing applications. Each panel has a perforated strip for quick installation, removing the need for clips and seaming, resulting in ease and speed during setup. This system provides for customizable panel widths to meet any demand, as well as two rib heights and a number of finishes, providing a wide range of design alternatives.

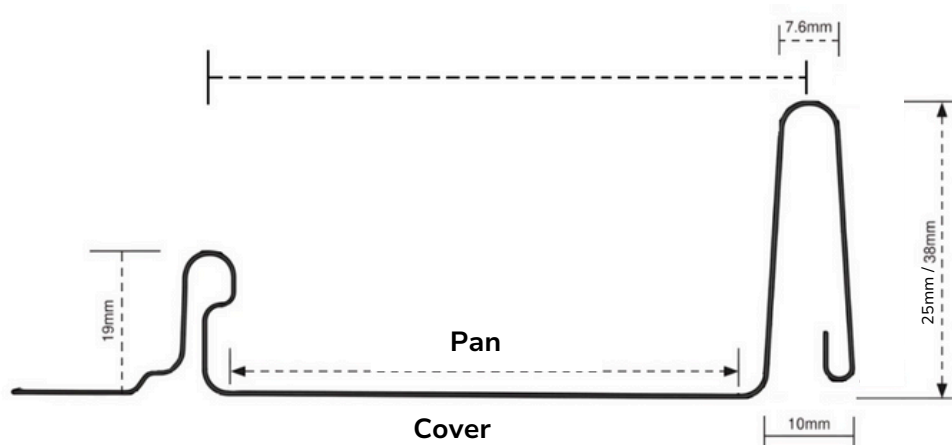


## PRODUCT SPECIFICATIONS

<b>Rib Height available</b>	25mm, 38mm
<b>Minimum roof pitch:</b>	3 degrees
<b>Min / Max Length</b>	8m - (4m recommended)
<b>Cover widths for 25mm</b>	195mm, 295mm & 495mm
<b>Cover widths for 38mm</b>	165mm, 265mm & 465mm
<b>Stop end and/ or hook</b>	fold up, fold down, fold hook
<b>Material</b>	Colorbond, Colorbond Matt, Colorbond Ultra, Zinalume, Galvanized, UNICOTE LUX

# SINGLE PANEL SHEET PROFILE

Easy to install all the cladding profiles as they do not require any clips or mechanical tools. The Panels can be layered and snapped easily using the profile of the nail strip.

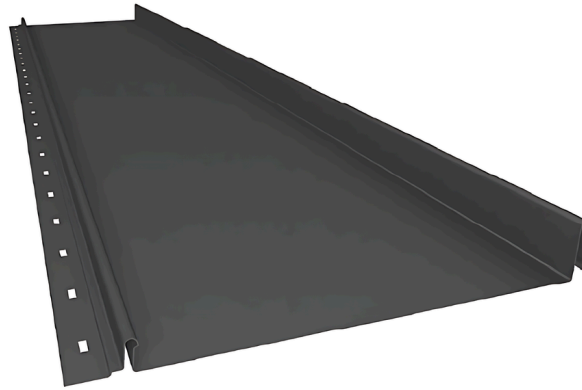

## FASTNER SPECIFICATIONS

METCLAD Nail Strip panels are securely fastened to the supports using concealed pierce-fixing. This means the fastener screws pass through the sheeting at the underlap edge, ensuring a sturdy installation.

Fasteners should be screwed either through the slotted holes provided or directly through, as required.



10g x 25mm

**NOTE : \*\*NO CLIPS ARE REQUIRED IN NAILSTRIP CLADDING PROFILE AS THE SCREWS ARE USED DIRECTLY FOR INSTALLING THE CLADDING\*\***

Discover the perfect cladding solution for your project. Contact us today!