


OVERVIEW



Enhance your building's exterior with METCLAD SNAPLOCK Cladding panels! These durable panels are easy to install and suitable for homes and businesses. Arrange them vertically, horizontally, or diagonally to achieve your desired aesthetic.

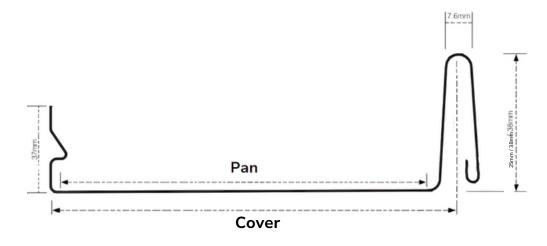

PRODUCT SPECIFICATIONS

Rib Height available	25mm, 38mm
Minimum roof pitch:	3 degrees
Min / Max Length	8m - (4m recommended)
Cover widths for 25mm	225mm, 325mm & 525mm
Cover widths for 38mm	190mm, 290mm & 490mm
Stop end and/ or hook	fold up, fold down, fold hook
Material	Colorbond, Colorbond Matt, Colorbond Ultra, Zincalume, Galvanized, UNICOTE LUX



SINGLE PANEL SHEET PROFILE



The Snap Lock profile features an adjustable recessed pan with a raised seam, Snaplock's simplified installation method doesn't require specialist tools.



FASTENER SPECIFICATIONS

Snaplock panels are attached to batten supports using concealed pierce-fixing. Clips secure the panels to the supports with screws, eliminating the need for fasteners passing through the Snaplock sheets.



10g x 16mm screws

SNAPLOCK CLIP

Ensure correct placement and secure attachment to batten supports.



Discover the perfect cladding solution for your project. Contact us today!



